



Fire-Rated Transfer Trays



P7097/F120 Front-Opening Pass-Through

SPECIFICATION:

Designed for high-security areas, with a bullet resistance classification of FB4 as standard.

FIRE RATING: 2 HOURS (F120)

Finish: aluminium lacquered as standard, or optionally anodised aluminium or stainless steel.

Installation aperture: 605mm W x 130mm H


Front facing: 630mm W x 165mm H

Carriage pass through dimensions: 330mm W x 235mm D x 30mm H

Optional deep carriage dimensions: 330 W x 346 D x 100mm H with required installation aperture 885mm W x 200mm H

Optional enhanced bullet resistance: FB6 / FB7

Optional integrated INTERCOM—front facing dimensions in this case 920mm W x 165mm H

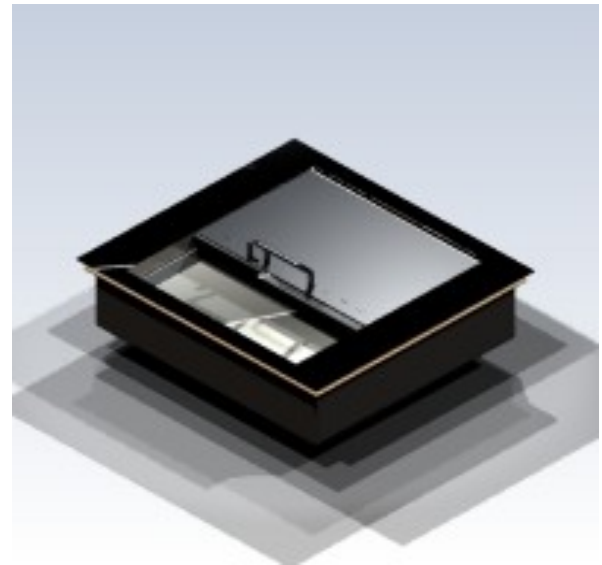

P7032/F60 Transfer Tray

SPECIFICATION:

Designed to be flush-mounted into counters, with a bullet resistance of FB4 as standard.

FIRE RATING: 60 MINUTES (F60)

Finish: Structural lacquered finish in RAL 9005 jet black as standard, or optionally in stainless steel or anodised aluminium, or another colour. Carriage in stainless steel.

Installation aperture: 535mm W x 485mm D

Carriage pass through dimensions: 384mm W x 274mm D x 30mm/86mm H (insert plate)

Optional deep carriage dimensions: 384mm W x 324mm D x 126mm H with required installation aperture 577mm W x 627mm D